


# CAT.6A, S-FTP(PIMF), 4P\*24AWG, PatchCord, XX M

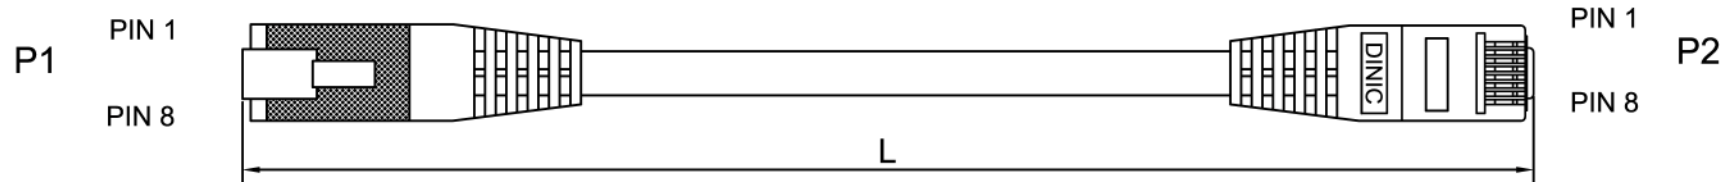

## PIN OUT

RJ45 8P8C PLUG

RJ45 8P8C PLUG



## Specification:

### 1. CABLE:

CAT.6 S-FTP(PIMF) 4P\*24AWG STRANDED,  
LSZH Jacket O.D.=6.0mm.

### 2. CONNECTOR:

P1 & P2: RJ45, 8P8C, Shielded long plug, Gold-Plated Steel, Pin gold plated.

### 3. MOLDING TYPE:

Molding w/o cap

### 4. TEST:

- (1)100% Open Short and miswire test.
- (2)Insulation resistance 1 MΩ MIN.

### 5. Printing in Blue INK:

TYPE CM 60°C (UL) E188630 24AWG CSA LL81295 CMG 60°C FT4 ETL VERIFIED  
TIA/EIA-568-B.2-10 CAT.6A Patch Cable S-FTP LSZH EVERNEW+ BATCH NO.

### 6. The tolerance of jumper length below 5 Meters is -10 to 50 mm , for longer than 5 Meters is -10 to 200mm .

		SPECIFICATION	CAT.6A, S-FTP(PIMF), 4P*24AWG, PatchCord		REV. 1.0
UNIT	MM	CUSTOMER		DRAWN BY	Wang Qianqian
SCALE	1:1	NO.		CHECK BY	
PAGE	1/1	DRAW NO.		APPROVAL BY	